

SUSTAINABLE REUSE AND TREATMENT OF WATERS IN SMALL TOWNS OF CASTILLA & LEÓN, SPAIN (Villavieja de Yeltes, Monleras and Saucelle)



García Roig, M., Manzano Muñoz, T., Cachaza Silverio, J.M., García Prieto, J.C.
Centro de Investigación y Desarrollo Tecnológico del Agua (C.I.D.T.A.) Universidad de Salamanca
Campus Miguel de Unamuno 37007 Salamanca (España)
E-mail: cidta@usal.es ; web: http://cidta.usal.es

Introduction:

The economic factor is the main cause to justify the abandonment of 90% of the outlined treatment systems. In this regard, include: The high costs of construction, maintenance and operation, do not establish appropriate penalties to ensure the smooth running of the service and the strong impact of the amortization for small populations.

Given this situation, it is necessary to develop a methodology for the design and dimensioning of wastewater treatment systems in small towns, that are effective and efficient and bringing the minimum social and environmental costs. The system must meet a number of objectives for the planning, costs and personnel and guarantee no pollution of water resources.

The main requirements are:

- 1) The equipment operation will be as natural as possible, seeking maximum integration in the environment.
- 2) The system should be as simple as possible, eliminating all those unnecessary processing units, but must take into account the conditions of discharge and that yields should be necessary, but no more.
- 3) Equipments must have low power consumption and maximum independence from foreign energy sources. Avoid automation or sophistications, which may require more skilled labor, or heavy reliance on foreign companies, reducing the cost of breakdowns and downtime of the plant.
- 4) Equipments must require minimal maintenance and facilities such that their breakdowns cause the least possible damage to the quality of effluent

Methods:

Selection Criteria:

For all the above, these facilities are called low-cost systems, their philosophy is to copy the natural phenomena and processes, but in less time and space, minimizing human action and avoiding unnatural energy consumption.

Various treatment systems are low cost, such as lagoons, soil application systems or geodepuration systems, biological filters, green filters, etc. The screening system adopted by the CIDTA is to obtain and optimize the best choice of treatment system to be implemented by computer simulation of the design and dimensioning of different combinations of primary treatments (septic tanks, decantation, decantation-digestion, etc) with different secondary treatments (lagoons, geodepuration systems, green filter, biological filters, etc), as well as its potential performance and economic impact.

As a result, rating matrices were developed according to different preset criteria and choosing the best option of treatment.

In depurification systems for small towns, as primary systems stands out the settling-digestion tanks, since they are systems that support well the seasonal variations of loadings that occur in such municipalities. Green filters stands out as secondary treatment and have been implemented in the towns of Monleras and Villavieja de Yeltes

Results and discussion:

The system implemented in Villavieja de Yeltes has the main objective of water depuration by means of a system integrated within the environment, taking advantage of the differences of levels of grounds which facilitates the draining downhill of waters and sludges.



This fact implies the total absence of mechanical or electrical devices, a low maintenance requirement and no need of maintenance qualified personnel.

After computer simulation of the different alternatives, it was chosen a system consisting of:

- a) pretreatment units for grinding and sand and grease removal
- b) a primary treatment such as a decanter-digester and drying beds and
- c) a secondary treatment of subsurface flow constructed wetlands plus an innovative process as a cascade of photocatalytic aeration of water falling downhill

The town of Monleras already had a primary wastewater treatment consisting of a septic tank and a secondary system was designed as a subsurface flow constructed wetlands followed of a surface wetland. The aim of this county is to obtain economic benefit of its wastewater through the use of the biomass generated, in particular by using plants of high economic performance, which in turn attract aquatic fauna of interest, allowing educational activities for students and actions of rural tourism, promoting the establishment and support of the population of low-income areas. This project has been chosen by the Hydrographic Confederation of Duero River in Castilla y León (Spain) as a pilot project of low-cost ecological water use.

The subsurface flow constructed wetlands are secondary wastewaters treatment systems with the highest profitability for irrigation of crops. The wastewater applied to irrigation is one of the options considered by the Spanish Royal Decree 1620/2007 laying down the legal framework for the reuse of treated waters. Wastewater must have special characteristics, and the crops must be fitted properly to the characteristics (organic load) and water consumption. Therefore, in the town of Saucelle this system was, also, designed to reuse treated water for irrigation.

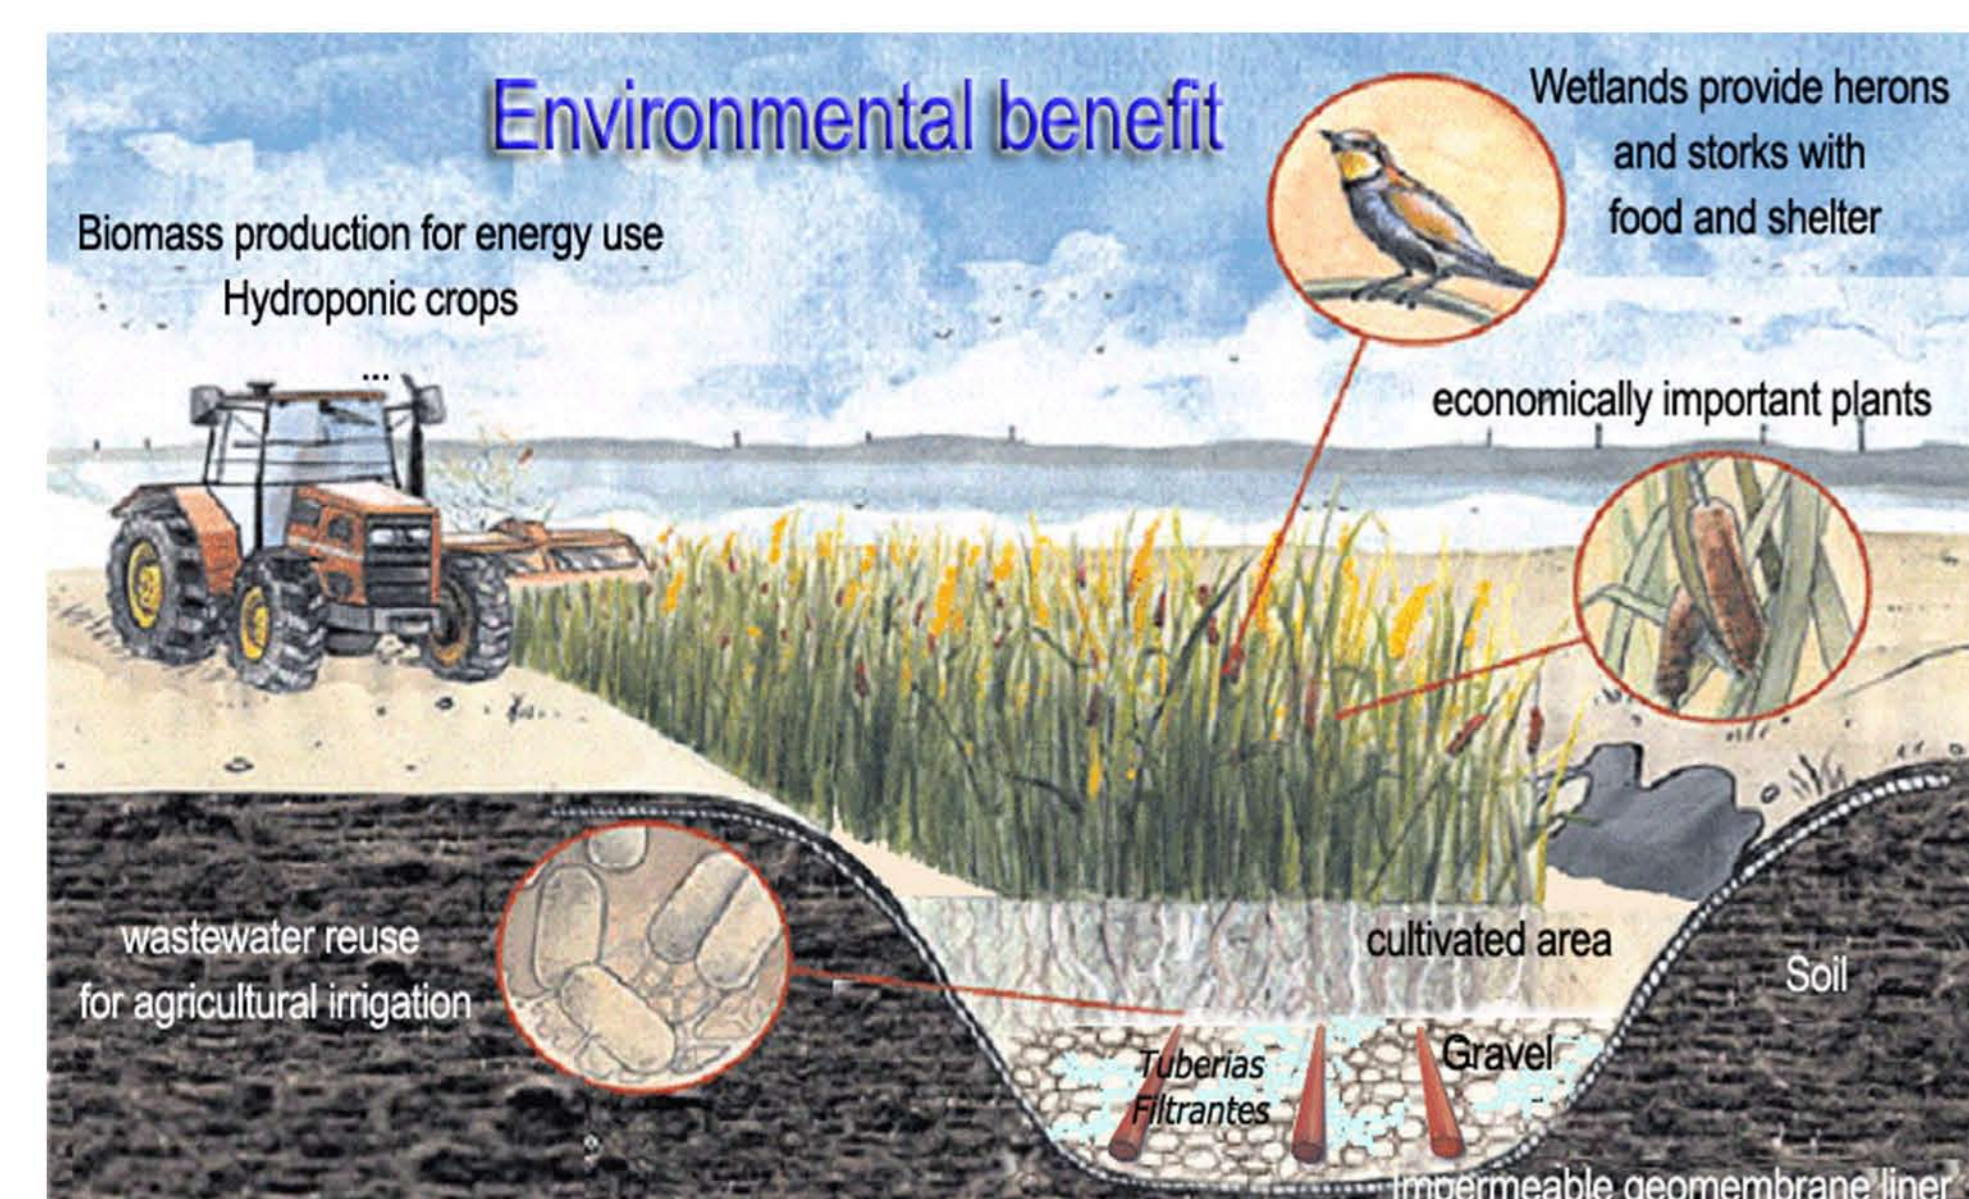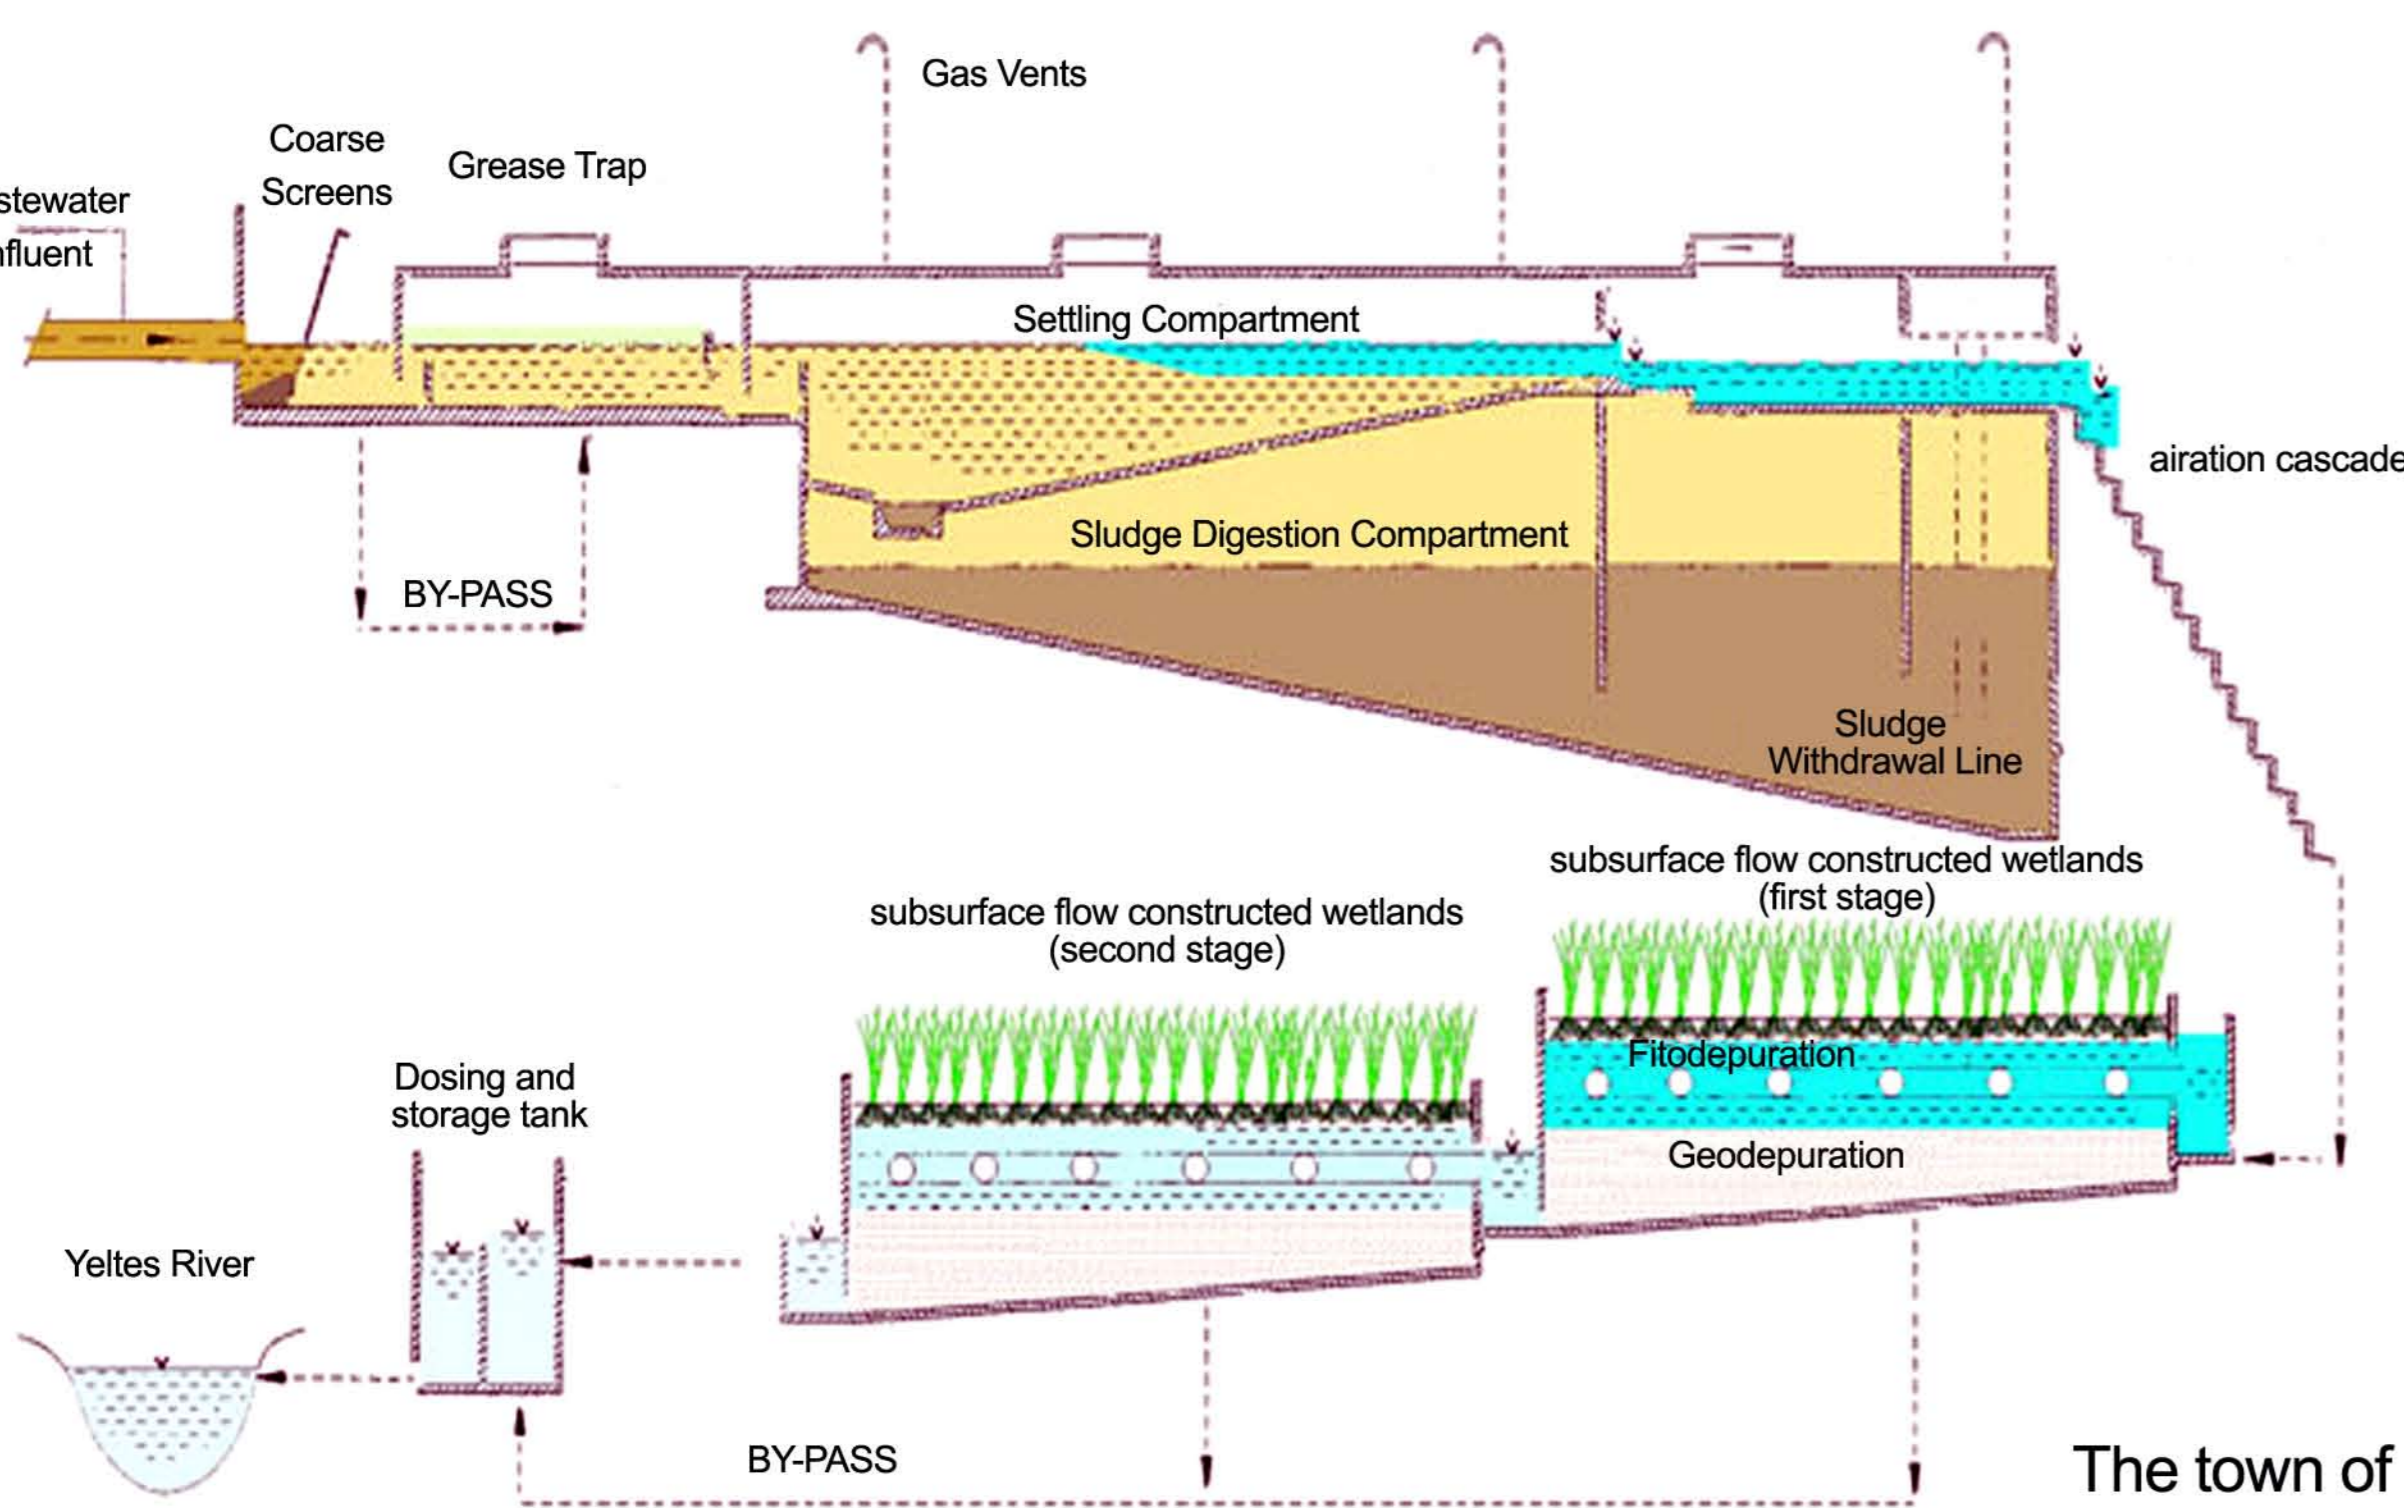

References:

Related CIDTA projects:

- García Prieto J. C., Cachaza Silverio, J.M. 2007 "Proyecto para la implantación de un humedal como tratamiento secundario de las aguas residuales urbanas de la localidad de Monleras (Salamanca)". Convenio Ayto Monleras-CIDTA (Univ. de Salamanca) España
- García Prieto J. C., Febrero, R., Cachaza Silverio 2005 "Proyecto para la reutilización de las aguas residuales urbanas en cultivos aprovechados como filtro verde en la localidad de Villavieja de Yeltes (Salamanca)" Convenio Ayto Villavieja de Yeltes-CIDTA (Univ. de Salamanca) España
- García Prieto J. C., Febrero, R., Hernández Sánchez, L.M, Sangrador Fontecha, R., Diez, A., Cachaza Silverio, J.M 2003-2007. Ensayos de Eficacia y Eficiencia de un reactor Fotocatalítico a escala de Planta Piloto en la degradación de contaminantes tóxicos (detoxificación) y en la inactivación de microorganismos (bacterias y virus) presentes en aguas de diferente procedencia. Convenio U.C.H.E .Chemical Europa S.A. – CECA SISTEMAS S.A. - CIDTA (Universidad de Salamanca) España
- García Prieto J. C., Hernández Sánchez, L.M, Sangrador Fontecha, R., Diez, A., Cachaza Silverio, J.M 2000 "Proyecto de intervención para el saneamiento de los ríos Tormes y Águeda como afluentes del río Duero" Exma Diputación de Salamanca- CIDTA (Univ. de Salamanca) España
- García Prieto J. C., Hernández Sánchez, L.M, Sangrador Fontecha, R., Diez, A., Cachaza Silverio, J.M 1999 "Evaluación del rendimiento de estaciones depuradoras de la provincia de Salamanca (España)" Exma Diputación de Salamanca- CIDTA (Univ. de Salamanca) España